


## R0713 Dual-Track Axial Absolute Encoder Target for iC-MU128

The R0713 is a dual-track axially magnetized absolute encoder target engineered for compatibility with the iC-MU128 chip. It utilizes a 32-pole pair Master-Track and a 31-pole pair Nonius-Track to ensure highly precise angular measurement. The target features a 27.2mm outer diameter and is designed for a 15mm shaft with a transition fit. For structural integrity, the magnetic component is securely mounted on a robust SUS430 stainless steel carrier.

### Product Overview:

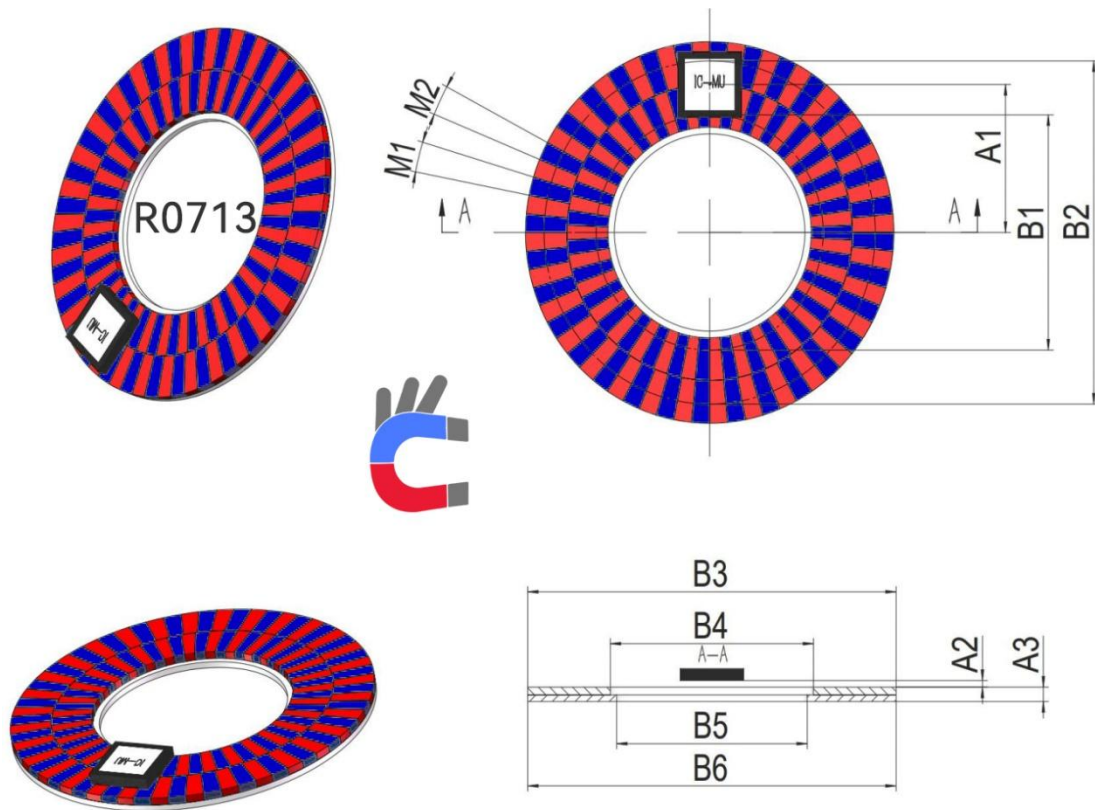

| Item NO. | Parameter                      | Comments                                | Typ. | Tolerance | Unit |
|----------|--------------------------------|-----------------------------------------|------|-----------|------|
| A1       | Radial Position of Chip Center | referred to axial center                | 10.8 |           | mm   |
| A2       | Distance Package Surface DFN   | referred to magnetic coating surface    | 0.4  |           | mm   |
| A3       | Total height                   | height of magnetic material and carrier | 1.1  | ±0.1      | mm   |
| B1       | Nonius-track diameter          | inner magnetic track diameter           | 18   |           | mm   |
| B2       | Master-track diameter          | outer magnetic track                    | 25.2 |           | mm   |

|     |                                     |                        |         |       |      |
|-----|-------------------------------------|------------------------|---------|-------|------|
|     |                                     | diameter               |         |       |      |
| B3  | Outer Diameter of magnetic material | magnetic material      | 27.2    | ±0.2  | mm   |
| B4  | Inner Diameter of magnetic material | magnetic material      | 16      | ±0.2  | mm   |
| B5  | Inner Diameter of metal carrier     | metal carrier          | 15      | +0.05 | mm   |
| B6  | Out diameter of metal carrier       | metal carrier          | 27.2    |       | mm   |
| M1  | Width of single nonius-track pole   |                        | 0.91    |       | mm   |
| M2  | Width of single master-track pole   |                        | 1.23    |       | mm   |
| Hc  | Coercive force                      | at 20°C                | 170     |       | kA/m |
| Br  | Remanence                           | at 20°C                | 20      |       | mT   |
| T   | Operating temperature               |                        | -35-120 |       | °C   |
| AMP | Magnetic field amplitude            | when the air gap 0.4mm | 3       |       | mT   |

## Product test screenshots:



Disclaimer: iC-Haus and iC-MU are registered trademarks of iC-Haus GmbH. CCmagnetics is an independent manufacturer and is not affiliated with, endorsed by, or sponsored by iC-Haus GmbH.

## About Us:



Established in 2010 and headquartered in Beijing, China, CCmagnetics is a duly registered commercial entity operating under the auspices of the Chinese industrial and commercial authorities.

CCmagnetics's mission is to enable customers to purchase magnetic rings without incurring, or minimizing, mold costs. To date, CCmagnetics has made over 1000+ magnetic ring specifications publicly available. These magnetic rings are compatible with a wide range of IC sensors and can be adapted to most motors and magnetic encoders, offering exceptional value for money.



#### Image Captions:

1. Surface-mounted external magnetization coil for magnetizing motor encoder magnetic rings.
2. Planar multipole magnetization coil for magnetizing axial encoder magnetic rings.
3. Torsional multipole magnetization coil for magnetizing radial encoder magnetic rings.
4. Embedded internal magnetization coil for magnetizing motor magnetic rings.
5. A delegation from a South Korean customer visits CCmagnetics.
6. CCmagnetics team conducts random inspections on encoder rings before shipment,

regardless of size or quantity.



#### Image Captions:

1. CCmagnetics' encoder magnetic rings utilize automated dispensing equipment to ensure a stable bond between the magnetic ring and the metal carrier.
2. CCmagnetics' encoder magnetic rings can be adhered to customer-designed metal carriers, maximizing the use of internal robot space.
3. The encoder magnetic ring that supports any metal carrier has been widely recognized and praised by customers.
4. Vulcanized rubber encoder magnetic rings awaiting packaging and shipment to Germany for use in handling robots.





CCmagnetics rubber encoder test data



Competitor rubber encoder test data



### Image Captions:

1. CCmagnetics' encoder magnetic ring test performance is excellent. The magnetic ring for this encoder model requires an In-range percentage of less than 60% to pass. CCmagnetics has achieved a remarkable In-range percentage of 40% or below.
2. Screenshot of a competitor's encoder magnetic ring test: While the magnetic pole observation appears normal and the price is lower, these products are unusable.

### Representative Patents

Since its inception, our company has been dedicated to the field of magnetic transmission and magnetic rings. Our representative patents include:



Patent Name 1: Comprehensive management system for magnetic ring production line

Patent Name 2: Fixture tooling for rubber mold

Patent Name 3: Axial magnetization equipment

Patent Name 4: Magnetic detection equipment for sealing ring

Patent Name 5: Torque adjustable magnetic coupling

Patent Name 6: Magnetic suction coupling with clutch function

## Ordering Information:

### Payment:

We accept payment via proforma invoice and 100% T/T.

Credit card payments are accepted, but a 2.9% surcharge will apply.

### Packaging and Logistics:

We accept delivery through the customer's preferred shipping company.

Our packaging materials, including tinplate, kraft paper, and foam, fully comply with EU environmental regulations.

### Delivery Time:

Shipment will be arranged within 30 days after receipt of payment. Delivery time may be shorter if our factory schedule permits.

Transportation time is estimated to be 7-10 days.

### **After-sales Service:**

Our products undergo rigorous quality inspection and testing before leaving the factory. Based on the demagnetization curve of neodymium iron boron, our products have a lifespan of 60-100 years under normal conditions.

Our products are made of metal and magnets that meet international standards, and the adhesives are made of the well-known brand 3M, and additional material safety reports can be provided.

If any quality issues are found within one year, please provide photos as proof. We will compensate with a new product in your next order. The defective product does not need to be returned.

### **Contact us:**

